




SCBD SERIES

DIGITAL LOAD CELLS

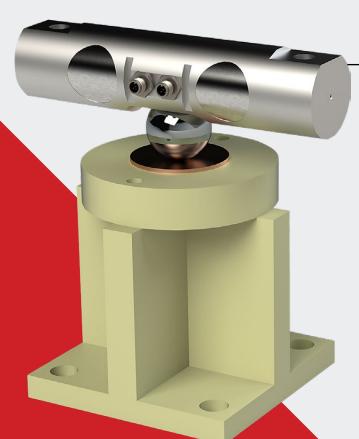

- Double-ended shear beam digital load cells
- High-capacity vehicle weighing
- Self-checking capabilities allow the scale to operate without bumper bolts or checkrods
- Cloud-based monitoring convenience
 - Stainless steel IP69K protection rating
- No junction box connections necessary













SELF-CHECKING DIGITAL DOUBLE-ENDED SHEAR BEAM LOAD CELLS

DIGITAL WEIGHING ACCURACY AND ISITE MONITORING CONVENIENCE


- 34,000 kg / 75,000 lb and
 45,000 kg / 100,000 lb capacities
 available
- Hermetically-welded, protection class IP69K
- Completely encapsulated with proprietary potting compound
- OIML and NTEP certified for international use


♦ Lightning protection

Cardinal Scale's SCBD series stainless steel digital load cells feature an IP69K-rated waterproof protection rating that is completely encapsulated and filled with a potting compound to fill all internal voids and prevent any potential for moisture entering the load cell.



MINIMIZE DOWNTIME DUE TO ONBOARD DIAGNOSTICS WITH E-MAIL/TEXT ALERTS

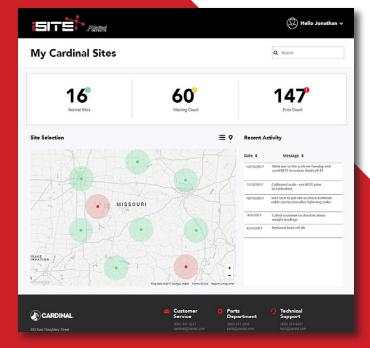


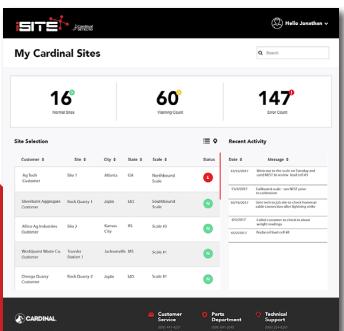


DIGITAL SOLUTIONS ALLOW CUSTOMERS TO PLAN FOR EXPANSION


THE SCBD SERIES SOLUTION CAN ADAPT AS YOUR PROJECT DEVELOPS

SmartCell® load cells are daisy-chained together, greatly easing cable runs

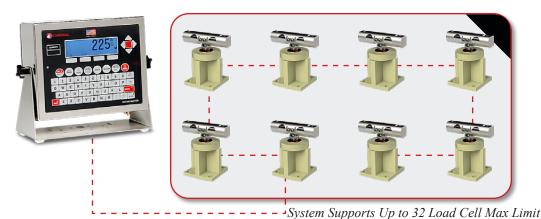









Scale 1

Scale 2

Scale 3

ADVANTAGES OF DIGITAL LOAD CELLS

- SmartCell® installation setup and maintenance is greatly simplified over older analog systems.
- Diagnostics are easy to perform, even for novice technicians new to the scale industry.
- The SmartCell® digital system detects and diagnoses faults and failures more quickly, efficiently, and precisely.
- Load cell level diagnostics allow for troubleshooting directly through Cardinal indicators.
- SmartCell® iSite diagnostic software sends cell failure notifications to scale technicians.

- Simplified wiring system and no junction box eliminates problems associated with traditional analog load cell systems.
- Scale productivity is increased due to expedited diagnosis.
- Costs associated with inspections are greatly reduced.
- SmartCell® issues can be diagnosed from a remote location.

- SmartCell® load cells offer the same industry-leading lightning protection that is featured in Cardinal weight indicators.
- SmartCell® stainless steel cell design ensures longer cell life and is IP69K rated against water.



Cardinal Scale's SCBD series kits provide all the electronics necessary for a digital truck scale, minus the weighbridge.







KEY FEATURES

- Supports up to 32 digital load cells Providing wide flexibility for suitable applications
- O Homerun cable uses standard cable and can be 300 meters in length Enables flexibility with location of indicator
- Standard (load cell to load cell) cable lengths 15 ft / 4.5 m, 27 ft / 8.2 m, and 37 ft / 11.2 m cable lengths available
- Ability to expand solution Solution can adapt
 as your project develops
- Clear error messages Reduce time to diagnose and rectify issues reduces downtime
- DLC card is compatible with existing 225 or 825 series indicators Ability to retrofit analog load cell solutions already in the market place

ON-SCREEN INDICATOR DIAGNOSTIC MENU EASES TROUBLESHOOTING



Cardinal Scale's 225D
Navigator and 825D
Spectrum indicators provide
onscreen diagnostics for
Cardinal digital load cells
enabling scale technicians
to see real-time errors such
as unresponsive load cells,
damaged analog sections,
invalid set-up parameters,
and it can also assist with
board replacements.


MINIMUM AND MAXIMUM WEIGHTS (This can be zeroed as needed)

	4AXIMUM	/ MINIMUN	1 WEIGHTS	
1. 2. 3. 4.	0.0/ - 0.5/ -	1. 2 1. 0 0. 1		
		0. 0 XT		EXIT

LIVE LOAD CELL WEIGHTS



LOAD CELL DAMAGED

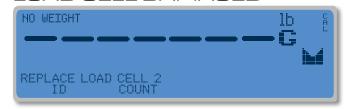

Cardinal Scale reserves the right to improve, enhance, or modify features and specifications without prior notice.



102 East Daugherty St., Webb City, MO 64870 USA Toll-Free: (800) 441-4237 E-mail: cardinal@cardet.com www.CardinalScale.com

SOLD BY:

