

**Protection Class** 

**Temperature Range** 

Temperature Effect

**Accuracy Class** 

IP-65

Rated Output:

Zero Balance:

± 0.0008%/ F of load

Compensated: 14°F to 104°F

Operating: -20°F to +200°F


± 0.0015%/ F of rated output


The unique design of Cardinal's single point load cells offers cost-saving advantages for many weighing applications. The load cell can be mounted directly to the weighing platform, thereby eliminating flexures, pivots, bearings and mechanical levers. All load cells feature threaded mounting holes, proprietary sealant, and a 7-ft / 2.1-m integral multiconductor cable secured by a strain relief seal.

## **Single Point SP-LM Series**

## Heavier-Capacity, Stainless Steel Load Cells




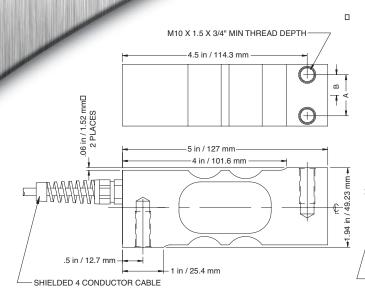

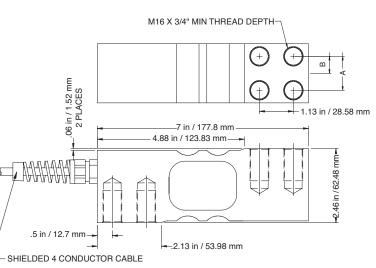

MODEL	CAPACITY	"A"	"B"
SP-200LM	200 lb / 90 kg	1 in / 25.4 mm	0.5 in / 12.7 mm

MODEL	CAPACITY	"A"	"B"
SP-500LM	500 lb / 225 kg	1.125 in / 28.6 mm	0.562 in / 14.3 mm
SP-1000LM	1,000 lb / 455 kg	1.125 in / 28.6 mm	0.562 in / 14.3 mm

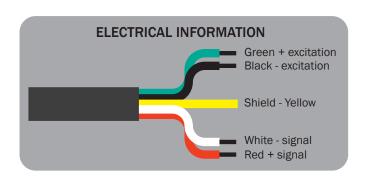



## **VCAP CERTIFIED**

Cardinal Scale has been formally audited and found to be fully compliant with the Verified Conformity Assessment Program (VCAP) administered by the National Type Evaluation Program (NTEP) of the National Conference on Weights and Measures (NCWM).

 $Cardinal\ Scale\ reserves\ the\ right\ to\ improve,\ enhance\ or\ modify\ features\ and\ specifications\ without\ prior\ notice.\ All\ registered\ trademarks\ are\ the\ property\ of\ their\ respective\ owners.$ 



**SOLD BY:** 



102 East Daugherty St., Webb City, MO 64870 USA Toll-Free: (800) 441-4237 E-mail: cardinal@cardet.com www.CardinalScale.com