6745
DIGITAL
BABY SCALE

DETECTO model 6745 baby scale

DETECTO®

- 1 gram divisions
- 30 lb / 15 kg capacity
- Roomy 22 in x 9 in / 57 cm x 23 cm weighing tray (flat portion)
- Full-color, touchscreen 3.2 in (diagonal) display with 320 x 240 resolution
- Fun, colorful animal graphics attractive for children
- Milk and Diaper stored tare weights

- (6) C batteries (not included) or AC adapter (included)
- Integral measuring tape (22 in / 56 cm long)
- Wide supportive scale base for infant safety
- 8-digit numeric patient ID for EMR/EHR
- Memory key to store and recall a weight
- Built-in carrying handles
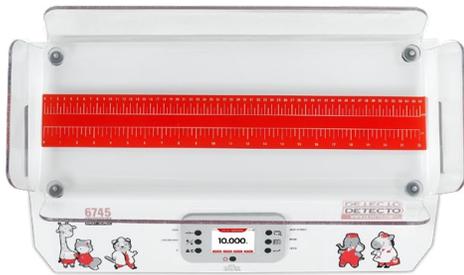- Metric only 6745KG model is also available

NTEP
ON NATIONAL CONFERENCE WEIGHTS AND MEASURES
NTEP Approved

Wi Fi ❋ Bluetooth™
Wi-Fi and Bluetooth 5.0 Connectivity

TAA COMPLIANT

MADE IN USA
of American and foreign components

ONEWEIGH
Units locking into lb or kg

6745 | DIGITAL BABY SCALE

MEASURING TAPE
0-22 in / 0-56 cm length measuring tape imprinted underneath the clear thermoplastic platform, so will never wear off during use.

PATIENT ID
The 6745's touchscreen graphics display allows you to enter up to an 8-digit numeric identification number for the patient, which can be sent to an EMR/EHR system.

CONNECTIVITY
Ports include 9-pin RS232 for sending data to a serial printer and USB-B for connecting with a PC for EMR/EHR, plus Wi-Fi and Bluetooth wireless connectivity is standard.

Capacity	6745	0 - 10 lb x 0.002 lb / 10 - 30 lb x 0.005 lb 0 - 10 lb x 0.02 oz / 10 - 30 lb x 0.05 oz 0 - 5 kg x 0.001 kg / 5 - 15 kg x 0.002 kg
	6745KG	0 - 5 kg x 0.001 kg / 5 - 15 kg x 0.002 kg
Platform Size (Flat Portion)		22.5 in W x 9.1 in D / 57.1 cm W x 23.1 cm D
Overall Dimensions		26 in W x 15.1 in D x 7.5 in H / 66 cm W x 38.4 cm D x 19.0 cm H
Display Type		3.2 in / 81.3 mm (diagonal) full-color TFT display 320 x 240 resolution
Touch Screen		Resistive touch panel covering the display
Keys		Mechanical switch type, Power, Zero, Lock/Release, ID, Cycle Display Mode, Menu, Print
Power Requirements		Models 6745 and 6745KG: Six C-size Alkaline, Ni-Cad, or NiMH batteries (not included) or model 6800-1045 100 to 240 VAC 50/60Hz 12V DC 1.2A UL/CSA power supply with US plug (included). Models 6745EU and 6745UK: Six C-size Alkaline, Ni-Cad, or NiMH batteries (not included) or model 6800-1047 multi-pin AC adapter (included).
Operating Environment		Operated Temperature Range: 50 to 104°F (+10 to +40°C) Humidity: 0 to 90% non-condensing
Communication Interfaces		Wi-Fi, Bluetooth 5.0, RS232, and USB-B
Shipping Weight		35 lb / 15.8 kg

StableSENSE DIGITAL FILTERING
StableSENSE adjustable filtering to compensate for baby movements

SOLD BY:

DETECTO®